



Polypropylene Vertical Air Flow Laminar Clean Bench - PRO

TopAir provides high-quality, Vertical Laminar Clean Benches. Clean benches are designed to supply a clean controlled work environment meeting Class 100/ISO 5 Cleanliness level. The clean bench is tested according to USA Federal Standard 209E/ISO 14644-1/CE.

TopAir's clean benches draw air from the room or hall space, pass it through a HEPA filter using a fan, and then distribute the clean air across the working area. In vertical benches, the filtered air is directed downwards through a filter installed at the top of the bench.

Structure:


- 8 mm welded polypropylene with high chemical resistance
- stainless steel 304 worktop, (SS316 optional)
- 5 mm safety glass front window with counterweight system
- Side windows for better visibility
- Optional Integrated Particle Monitoring System (IPMS)

The IPMS measures particle concentration in real-time, monitoring the cleanliness level 24/7. Its display clearly indicates whether the cleanliness level complies with ISO-5, and alerts when the workspace has been contaminated or needs to be serviced.

Red Light Alert:

Whenever there is an air velocity failure, a red light inside the unit switches on and the system automatically switches off. This enables convenient detection of failures from a distance, facilitating notice even for the hearing-impaired.

- Microprocessor control system with 10.1" color touchscreen display
- Automatic speed control to maintain 0.33 m/s (66 fpm)
- Downflow alarms, critical "red light" chamber alarm, service alarm, filter alarm
- Real-time filter status gage display
- High efficiency quiet EC fan
- Germicidal waterproof UV light (254 nm) system and safety interlock mechanism
- LED light 800 lux
- 2 x universal sockets
- Includes metal stand and casters
- Multi-language control with metric or Imperial units
- Compliance with US Federal Standard 209E / ISO 14644-1 / CE
- Optional Integrated particle monitoring system (IPMS)

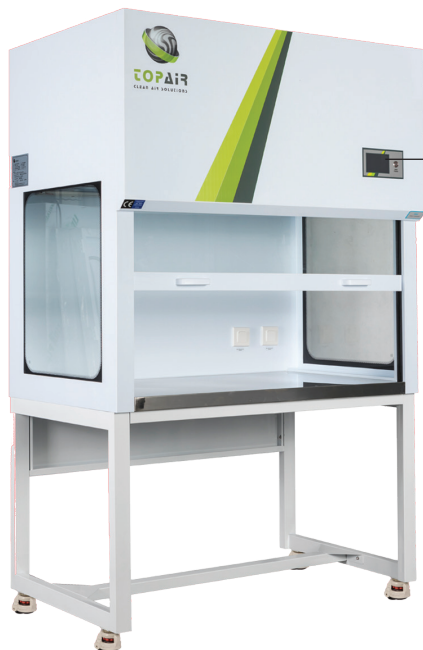

Polypropylene Vertical Air Flow Laminar Clean Bench - PRO

| Spec/ Model | HC-V090-PRO | HC-V120-PRO | HC-V150-PRO | HC-V180-PRO |
|---|--|---|--|---|
| Outer Dimensions WxDxH | 35.4 x 33.4 x 51.9" 900 x 850 x 1320 mm | 47.2 x 33.4 x 51.9" 1200 x 850 x 1320 mm | 59 x 33.4 x 51.9" 1500 x 850 x 1320 mm | 70.8 x 33.4 x 51.9" 1800 x 850 x 1320 mm |
| WE CAN CUSTOMIZE ANY SIZE - EVEN A SINGLE UNIT! CONTACT US FOR DETAILS | | | | |
| Workspace (W x D x H) | 30.3 x 27.5 x 29.5" 770 x 700 x 750 mm | 42.1 x 27.5 x 29.5" 1070 x 700 x 750 mm | 53.9 x 27.5 x 29.5" 1370 x 700 x 750 mm | 65.7 x 27.5 x 29.5" 1670 x 700 x 750 mm |
| Test Standard | USA Federal Standard 209E / ISO-14644-1, CE | | | |
| Air Velocity m/s | 0.33 m/s, 66 fpm | | | |
| Cleanliness in Workstation | Class-100 (FS 209E) ISO-5, ISO-14644-1 | | | |
| Hood Material | Polypropylene | | | |
| Worktop Material | Stainless steel 304 | | | |
| Noise Level (Tested 20 cm from worktop, 1.2 m / 48" above ground) | <52dB | <54dB | <56dB | <56dB |
| Power Supply | 110 / 220 V, 50/60 Hz, Single phase | | | |
| Illumination | 800 lux LED lighting | | | |
| Filters | HEPA Filter Efficiency of 99.9995% at 0.3 microns H14 (Optional ULPA filter) | | | |